
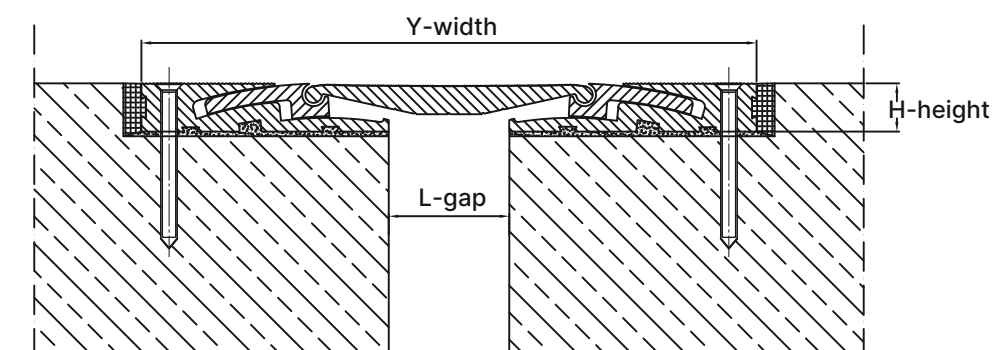


TECHNICAL DATA SHEET

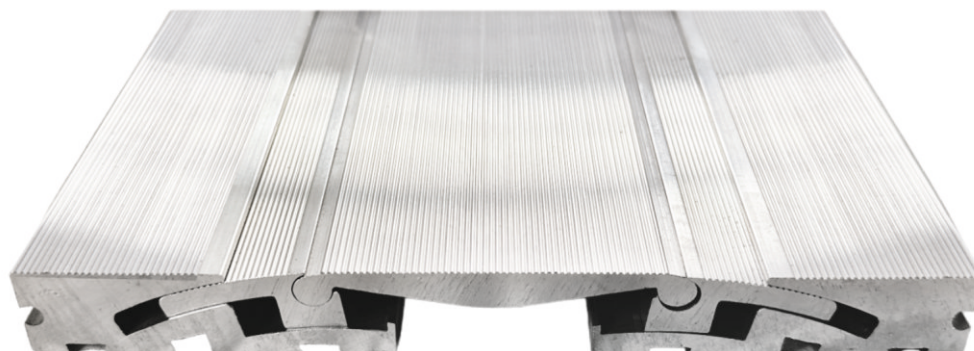

Conecto HDS construction connector is specifically designed for use in on higher floors(ceiling) in large-scale buildings and industrial . Its has vertical and horizontal movements makes it particularly suited for managing seismic stresses.

Right installation process provides ensuring long-lasting strength and stability of industrial floor. This solution is ideal for applications where durability, low maintenance, and noise reduction are critical.

ART.	L mm*	H mm*	Y mm*	Horizontal movements mm	Vertical movements mm
HDS 230.20.25	50	25	230	+/- 20	+/- 15
HDS 255.20.25	75	25	255	+/- 20	+/- 15
HDS 295.20.25	115	25	295	+/- 20	+/- 15
HDS 260.30.25	40	25	260	+/- 30	+/- 20
HDS 285.30.25	65	25	285	+/- 30	+/- 20
HDS 320.30.25	100	25	320	+/- 30	+/- 20

- standard lenght 3 meters