

TECHNICAL DATA SHEET




Conecto 06NC50/20x40 heavy-duty joint is specifically designed to provide vibration-free movement across joint areas in industrial concrete floors. Its exceptional shape designed for heavy load forklift, ensuring smooth and efficient operation. This solution distribute forklift loads between floor slabs. Armoured joints help to reduce stresses and prevent cracking, significantly extending the lifespan of the floor. This solution not only enhances durability but also improves user comfort work, making it ideal for high-traffic industrial areas.

Places of application

- Industrail floors
- Logistic and distribution centers
- Industrail buildings
- Industrial storage facilities

TECHNICAL DATA SHEET

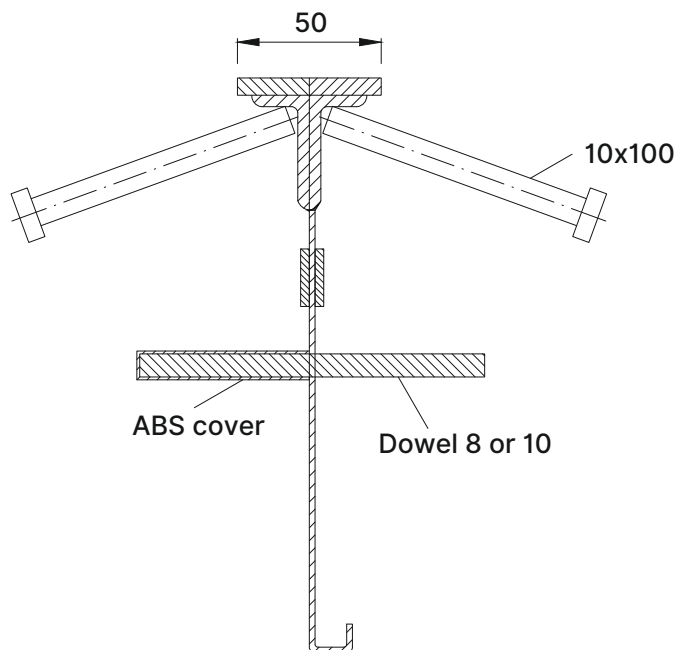

Floor height [mm]	Profile height [mm]	Dowel size [mm]	Dowel spacing [mm]	kg/m
125	100	180x120x8	600	10,80
150	125			11,20
175	155			11,70
200	175			12,00
225	200			12,40
250	225			12,80
275	250			13,20
300	275			13,60

- possibility to prepare profiles in any height (every 5mm)
- standard lenght 3 meters

