



## conecto Park Ga

Watertight expansion joints for car park groove applications.


Designers enjoy the system for reliability and the small size of the visible element aligned with the parking floor surface. High resistance to traffic and loads. System is glued to the surface using

resin adhesive. Joint is anchored tight and the groove is filled with resin grout.


Application of flexible material on joint rims makes the properly installed cover virtually indestructible. The removable cover allows for elastomer replacement in case of mechanical damage.

This system has proven its qualities at numerous parking across Europe. In case of groove high, we use Conecto GA on upper mounting bracket (angles with pulling rods)


Conecto GA joint also comes in a corner model and model with long rubber to connect with waterproofing membrane.

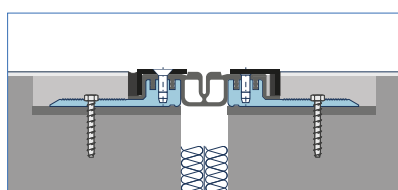

groove version

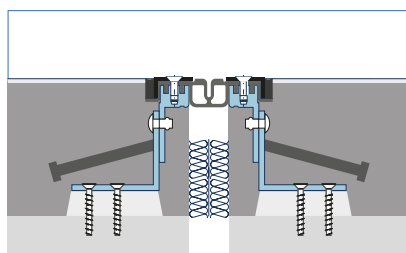

groove high

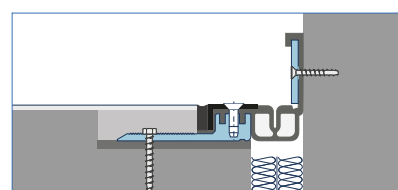

corner version

Conecto Park Ga	Visible element (mm)	Gap width (mm)	Base width (mm)	Installation height (mm)	Material type	Maximum load (kN)	Horizontal/Vertical compensation (mm)
Ga 43.10	89	max 65	214	25, 35, 45, 55, 70, 90, 100-200, CV	aluminum, EPDM, steel	600	20 (±10) 20 (±10)
GA 50.20	97	max 77	222	25, 35, 45, 55, 70, 90, 100-200, CV	aluminum, EPDM, steel	600	40 (±20) 40 (±20)
GA 63.30	109	max 86	235	25, 35, 45, 55, 70, 90, 100-200, CV	aluminum, EPDM, steel	600	60 (±30) 60 (±30)
GA 88.45	134	max 111	260	25, 35, 45, 55, 70, 90, 100-200, CV	aluminum, EPDM, steel	300	90 (±45) 90 (±45)

CV - corner version  
groove version between 100-200mm height