


## TECHNICAL DATA SHEET

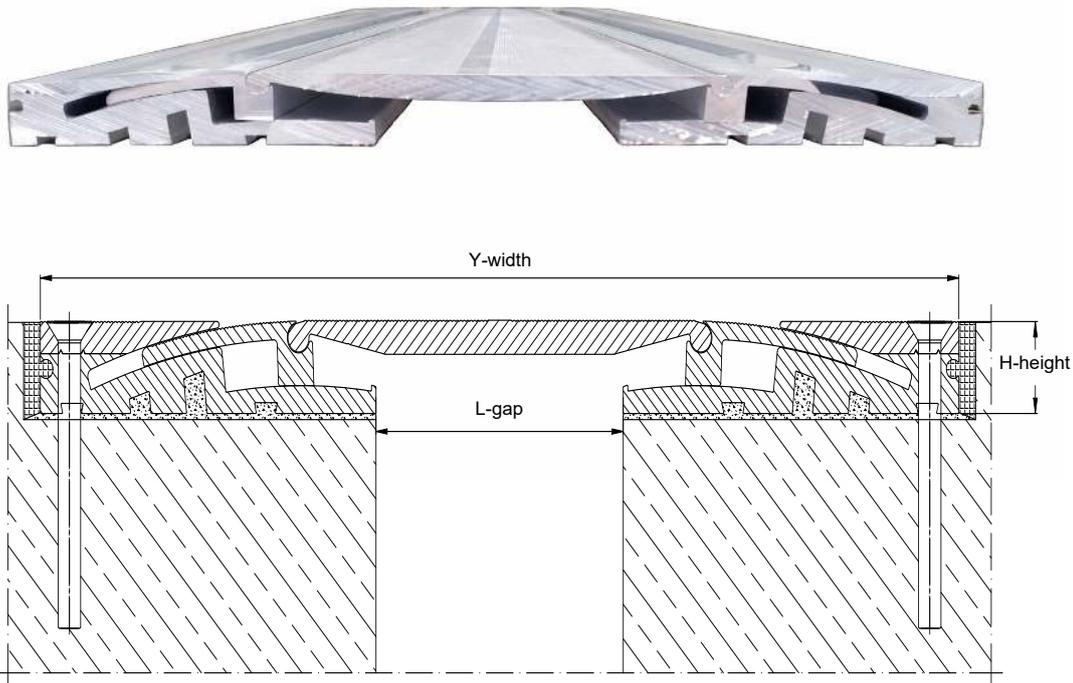

Conecto HDS (Split Type) is our innovative solution that allows for quick and easy replacement of upper and middle elements without the need to replace the entire profile like in the rest of HDS joints

Construction of this connector is specifically designed for use in on higher floors(ceiling) in large-scale buildings and industrial areas. This solution provides vertical and horizontal movements that makes it particularly suited for managing seismic stresses.

Correct mounting process provides ensuring long-lasting strength and stability of industrial floor. This solution is ideal for applications in places where durability, low maintenance, and noise reduction are critical.

ART.	L mm*	H mm*	Y mm*	Horizontal movements mm	Vertical movements mm
HDS 410.50.30	110	30	410	+/- 50	+/- 25
HDS 650.100.35	75	35	650	+/- 100	+/- 25

- standard lenght 3 meters